



Modbus Protocol

THG03

CO2 Temp. & Humidity Transmitter (Indoor)

THR23

Indoor Temperature & Humidity Transmitter

GS23

CO2 Transmitter / Indoor type



Introduction

This document describes the protocol detail of Modbus for THG03 / THR23 / GS23

Hardware interface

- The interface on the sensor is RS-485.
- Hardware named D+, D-
- Meet the standards TIA/EIA-232-F and TIA/EIA-485-A

RS-485 Address, Baud rate, Data format

- Address: 1~247
- Baud rate: 9600, 19200, 38400, 57600, 115200
- Parity: None, Even, Odd
- Data length: 8 bit
- Stop bit: 1 or 2 bit
- Default Address = 1, Data format= 9600, N81


About Modbus (ref PI-MBUS-300)

- Support RTU mode
- Broadcast support (Address 0)
- Bit addressable items (i.e. Coils and Discrete inputs) will not be implemented
- Measurement Values are represented in IEEE 754 single-precision 32-bit floating point type http://en.wikipedia.org/wiki/IEEE_754
- Modbus protocol structure:
 - 1st byte: Address (1~247)
 - 2nd byte: Function code (1 byte)
 - 3~Nth bytes: Data bytes
 - N+1th~N+2th byte: CRC (16 bits), LSB first

Instrument Holding Registers for application engineering (ex: ModScan)

Item No.	Address	Address HEX	Parameter	Point Type	Data Type	Value
1	01	0001H	Temperature	HOLDING REGISTER	Floating Pt.	°C
2	05	0005H	Relative Humidity	HOLDING REGISTER	Floating Pt.	%
3	09	0009H	Carbon Dioxide (CO2)	HOLDING REGISTER	Floating Pt.	PPM
4	562	0232H	Carbon Dioxide (CO2)	HOLDING REGISTER	Integer	PPM
5	564	0234H	Temperature	HOLDING REGISTER	Integer	°Cx10
6	566	0236H	Relative Humidity	HOLDING REGISTER	Integer	% x10

- The base address is 1 rather than 0 in ModScan application.
- The register shown on the table is 1 byte whereas the ModScan 2 bytes.
- So the corresponding value against address 5 of the "table" would be address 40003 of the ModScan

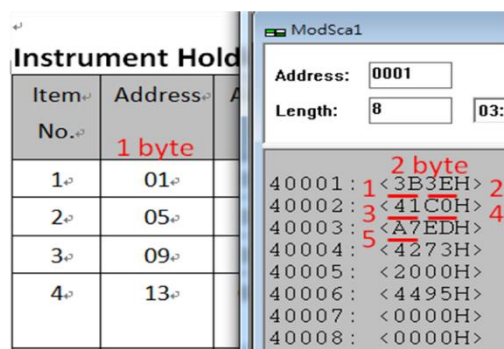

The screenshot shows the ModScan1 window with the following settings: Address: 0001, Length: 8, and a list of registers. The registers are listed as follows:

Item No.	Address	Value
1	01	<3B3EH>
2	05	<41C0H>
3	09	<A7EDH>
4	13	<4273H>
5	17	<2000H>
6	1B	<4495H>
7	1F	<0000H>
8	23	<0000H>

Instrument Holding Registers (rev 0.1)

Item No.	Address	Address HEX	Parameter	Data Bytes	Data Type	Value
Information						
1	65-80	0041H-0050H	Model Name	16 bytes	ASCII	
2	81-96	0051H-0060H	Serial Number	16 bytes	ASCII	
3	97-112	0061H-0070H	Firmware version	16 bytes	ASCII	
RS-485 Slave Address, Baud rate, Data format						
4	129	0081H	Slave Address	1 bytes	unsigned Integer	1-247
5	131	0083H	Baud rate	1 bytes	unsigned Integer	0: 9600 1: 19200 2: 38400 3: 57600 4: 115200
6	133	0085H	Data type	1 bytes	unsigned Integer	0: N81 1: N82 2: E81 3: E82 4: O81 5: O82

ASCII format, Item No. 1-3

1st Word		2nd Word		3rd Word		4th Word		5th Word		6th Word		7th Word		8th Word	
Hi byte	Lo byte	Hi byte	Lo byte	Hi byte	Lo byte	Hi byte	Lo byte	Hi byte	Lo byte	Hi byte	Lo byte	Hi byte	Lo byte	Hi byte	Lo byte

“ABCDEF0123456789” is represented in byte of hexadecimal as

<41><42><43><44><45><46><30><31><32><33><34><35><36><37><38><39>

IEEE754 format

Data Hi Word, Hi Byte		Data Hi Word, Lo Byte		Data Lo Word, Hi Byte		Data Lo Word, Lo Byte	
EEEE	EEEE	EMMM	MMMM	MMMM	MMMM	MMMM	MMMM

Where

S represents the sign bit where 1 is negative and 0 is positive

E is the two’s complement exponent with an offset of 127 i.e. an exponent of zero is represented by 127, an exponent of 1 by 128 etc.

M is the 23-bit normal mantissa. The highest bit is always 1 and, therefore, is not stored.

Using the above format the floating point number 23.83 is represented in byte of hexadecimal as <41><BE><A3><D7>:

Data Hi Word, Hi Byte	Data Hi Word, Lo Byte	Data Lo Word, Hi Byte	Data Lo Word, Lo Byte
0x41	0xBE	0xA3	0xD7

Communication Examples

Read Temperature Measurement Value

Request the host (PC or PLC) to polling the data of THG03/THR23/GS23			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Starting Address Hi	00	Byte	1
Starting Address Lo	00	Byte	1
No. of registers Hi	00	Byte	1
No. of registers Lo	02	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

*Registers of Temperature are 0x00 ~ 0x03

Response THG03/THR23/GS23 response data to the host (PC or PLC)			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Byte Count	04	Byte	1
IEEE 754 Data Lo Word, Hi Byte	0xA3	Byte	1
IEEE 754 Data Lo Word, Lo Byte	0xD7	Byte	1
IEEE 754 Data Hi Word, Hi Byte	0x41	Byte	1
IEEE 754 Data Hi Word, Lo Byte	0xBE	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

* the floating point number 23.83 is represented in byte of hexadecimal as

<41><BE><A3><D7>

Read Relativity Humidity Measurement Value

Request the host (PC or PLC) to polling the data of THG03/THR23/GS23			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Starting Address Hi	00	Byte	1
Starting Address Lo	04	Byte	1
No. of registers Hi	00	Byte	1
No. of registers Lo	02	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

*Registers of Relativity Humidity are 0x04 ~ 0x07

Response THG03/THR23/GS23 response data to the host (PC or PLC)			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Byte Count	04	Byte	1
IEEE 754 Data Lo Word, Hi Byte	0x77	Byte	1
IEEE 754 Data Lo Word, Lo Byte	0xCF	Byte	1
IEEE 754 Data Hi Word, Hi Byte	0x42	Byte	1
IEEE 754 Data Hi Word, Lo Byte	0x13	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

* the floating point number 36.87 is represented in byte of hexadecimal as

<42><13><77><CF>:

Read Carbon Dioxide (CO2) Measurement Value

Request the host (PC or PLC) to polling the data of THG03/THR23/GS23			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Starting Address Hi	00	Byte	1
Starting Address Lo	08	Byte	1
No. of registers Hi	00	Byte	1
No. of registers Lo	02	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

*Registers of Carbon Dioxide are 0x08 ~ 0x0B

Response THG03/THR23/GS23 response data to the host (PC or PLC)			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Byte Count	04	Byte	1
IEEE 754 Data Lo Word, Hi Byte	0x4C	Byte	1
IEEE 754 Data Lo Word, Lo Byte	0xCD	Byte	1
IEEE 754 Data Hi Word, Hi Byte	0x44	Byte	1
IEEE 754 Data Hi Word, Lo Byte	0x0C	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

* the floating point number 561.2 is represented in byte of hexadecimal as

<44><0C><4C><CD>:

Read Temperature Measurement Value In Integer

Request the host (PC or PLC) to polling the data of THG03/THR23/GS23			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Starting Address Hi	02	Byte	1
Starting Address Lo	33	Byte	1
No. of registers Hi	00	Byte	1
No. of registers Lo	01	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

*Register of Temperature is 0x0233

Response THG03/THR23/GS23 response data to the host (PC or PLC)			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Byte Count	02	Byte	1
Integer Data , Hi Byte	0x00	Byte	1
Integer Data, Lo Byte	0xEE	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

* the integer number 238 is represented in byte of hexadecimal as <00><EE> and the temperature reading is 23.8

Read Relativity Humidity Measurement Value In Integer

Request the host (PC or PLC) to polling the data of THG03/THR23/GS23			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Starting Address Hi	02	Byte	1
Starting Address Lo	35	Byte	1
No. of registers Hi	00	Byte	1
No. of registers Lo	01	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

*Register of Relative Humidity is 0x0235

Response THG03/THR23/GS23 response data to the host (PC or PLC)			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Byte Count	02	Byte	1
Integer Data , Hi Byte	0x01	Byte	1
Integer Data, Lo Byte	0x71	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

* the integer number 369 is represented in byte of hexadecimal as <01><71> and the humidity reading is 36.9

Read Carbon Dioxide (CO2) Measurement Value In Integer

Request the host (PC or PLC) to polling the data of THG03/THR23/GS23			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Starting Address Hi	02	Byte	1
Starting Address Lo	31	Byte	1
No. of registers Hi	00	Byte	1
No. of registers Lo	01	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

*Register of Carbon Dioxide is 0x0231

Response THG03/THR23/GS23 response data to the host (PC or PLC)			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Byte Count	02	Byte	1
Integer Data , Hi Byte	0x02	Byte	1
Integer Data, Lo Byte	0x31	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

* the integer number 561 is represented in byte of hexadecimal as <02><31> and the Carbon Dioxide reading is 561

Read Serial No.

Request the host (PC or PLC) to polling the data of THG03			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Starting Address Hi	00	Byte	1
Starting Address Lo	50	Byte	1
No. of registers Hi	00	Byte	1
No. of registers Lo	08	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

*Registers of Serial No. are 0x50 ~ 0x5F

Response THG03 response data to the host (PC or PLC)			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Byte Count	10	Byte	1
1st Word, Lo byte	0x4E	Byte	1
1st Word, Hi byte	0x53	Byte	1
2nd Word, Lo byte	0x31	Byte	1
2nd Word, Hi byte	0x30	Byte	1
3rd Word, Lo byte	0x33	Byte	1
3rd Word, Hi byte	0x32	Byte	1
4th Word, Lo byte	0x35	Byte	1
4th Word, Hi byte	0x34	Byte	1
5th Word, Lo byte	0x37	Byte	1
5th Word, Hi byte	0x36	Byte	1
6th Word, Lo byte	0x39	Byte	1
6th Word, Hi byte	0x38	Byte	1
7th Word, Lo byte	0x42	Byte	1
7th Word, Hi byte	0x41	Byte	1
8th Word, Lo byte	0x44	Byte	1
8th Word, Hi byte	0x43	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

*example of Serial No. is "SN0123456789ABCD"

Read Firmware Version

Request the host (PC or PLC) to polling the data of THG03			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Starting Address Hi	00	Byte	1
Starting Address Lo	60	Byte	1
No. of registers Hi	00	Byte	1
No. of registers Lo	08	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

*Registers of Firmware Version are 0x60 ~ 0x6F

Response THG03 response data to the host (PC or PLC)			
Field Name	Value	Type	Byte
Address of Transmit	1~247	Byte	1
Read Holding registers	03	Byte	1
Byte Count	0A	Byte	1
1st Word, Lo byte	0x31	Byte	1
1st Word, Hi byte	0x56	Byte	1
2nd Word, Lo byte	0x33	Byte	1
2nd Word, Hi byte	0x32	Byte	1
3rd Word, Lo byte	0x2E	Byte	1
3rd Word, Hi byte	0x34	Byte	1
4th Word, Lo byte	0x36	Byte	1
4th Word, Hi byte	0x35	Byte	1
5th Word, Lo byte	0x38	Byte	1
5th Word, Hi byte	0x37	Byte	1
6th Word, Lo byte	0x42	Byte	1
6th Word, Hi byte	0x41	Byte	1
7th Word, Lo byte	0x44	Byte	1
7th Word, Hi byte	0x43	Byte	1
8th Word, Lo byte	0x46	Byte	1
8th Word, Hi byte	0x45	Byte	1
CRC Lo	CRC Lo	Byte	1
CRC Hi	CRC Hi	Byte	1

*example of Firmware Version is "V1234.5678ABCDEF"

Revise history

- V1 2017_04_18 Initial
- V2 2017_11_06 Integrated communication address for ModScan
- V3 2022_11_16 add communication example of CO2 Measurement

eyc-tech Measuring Specialist

enhance your capability with **sensor** technology

Air flow | Humidity | Dew point | Differential pressure | Liquid flow

Temp. | Pressure | Level | Air quality | Signal meter



Tel. : 886-2-8221-2958

Web : www.eyc-tech.com

e-mail : info@eyc-tech.com